APPENDIX 1: ADA CHECKLIST



ADA Checklist for Existing Facilities

Priority 1 – Approach & Entrance

Based on the 2010 ADA Standards for Accessible Design

| | Project |
|--------|-----------|
| | Building |
| | Location |
| 36"min | Date |
| | Surveyors |
| | • |
| | |

An accessible route from site arrival points and an accessible entrance should be provided for everyone.



Institute for Human Centered Design www.HumanCenteredDesign.org

Copyright © 2016



ADA National Network Questions on the ADA 800-949-4232 voice/tty

www.ADAchecklist.org

Contact Information

This checklist was produced by the New England ADA Center, a project of the Institute for Human Centered Design and a member of the ADA National Network. This checklist was developed under a grant from the Department of Education, NIDRR grant number H133A060092-09A. However the contents do not necessarily represent the policy of the Department of Education, and you should not assume endorsement by the Federal Government.

Questions or comments on the checklist contact the New England ADA Center at 617-695-0085 voice/tty or ADAinfo@NewEnglandADA.org

For the full set of checklists, including the checklists for recreation facilities visit www.ADAchecklist.org.

Copyright © 2016 ADA Checklist for Existing Materials. You can freely reproduce and distribute this content. Include proper attribution. But you must get permission before using this content as a fee-based product.


| Prio | rity 1 – Approach & Entra | ince | | | | Comments | Possible Solutions |
|-------|--|---------------------------|------------|---|----------------------|----------|---|
| 1.1 | Is there at least one route from site arrival points (parking, passenger loading zones, public sidewalks and public transportation stops) that does not require the use of stairs? [See 2010 ADA Standards for | If yes, loca of route: | No | | | Photo #: | Add a ramp Regrade to 1:20 maximum slope Add a lift if site constraints prevent other solutions |
| Daula | Accessible Design – 206.2.1] | | | <u> </u> | | P10t0 #. | |
| Рагк | ing Accessible parking spaces should b | be identified | by size, a | access aisle and signa | - | 1 | |
| 1.2 | If parking is provided for the public, are an adequate number | Yes | No | Total Spaces | Accessible Spaces | | Reconfigure by repainting lines |
| | of accessible spaces provided? | Total #: | | 1 - 25 | 1 | | • |
| | [208.2] | Accessible #: | | 26 - 50 | 2 | | • |
| | | | | 51 - 75 | 3 | | |
| | | | | 76 - 100 | 4 | | |
| | | | | 100+ see 2010 St | andards 208.2 | Photo #: | |
| 1.3 | Of the accessible spaces, is at least one a van accessible space?* [208.2.4] | Yes | No | *For every 6 or fraction of 6 parking spaces required by the table above, at least 1 should be a van accessible space. | | | * If constructed before 3/15/2012, parking is compliant if at least 1 in every 8 accessible spaces is van accessible |
| | | | | | | Photo #: | Reconfigure by repainting lines |

| 1.4 | Are accessible spaces at least 8 feet wide with an access aisle at least 5 feet wide? [502.2, 502.3] Note: Two spaces may share an access aisle. Check state/local requirements; some specify that each space have its own aisle. | Yes No Measurement: | e S'min→S'min→ | Photo #: | Reconfigure by repainting lines |
|-----|---|--|-----------------------------------|----------------|--|
| 1.5 | Is the van accessible space: At least 11 feet wide with an access aisle at least 5 feet wide? Or At least 8 feet wide with an access aisle at least 8 feet wide? [502.2] | Yes No Measurement: Yes No Measurement: | or -11'min5'min- 8'min8'min | Photo #: | Reconfigure to provide van-accessible space(s) |
| 1.6 | Is at least 98 inches of vertical clearance provided for the van accessible space? [502.5] | Yes No Measurement: | 98"min | NA Photo #: | Reconfigure to provide van-accessible space(s) |

| 1.7 | Are the access aisles marked so as to discourage parking in them? [502.3.3] Note: The marking method and color may be addressed by state/local requirements. | Yes No | area to be marked | Photo #: | Mark access aisles |
|------|---|------------------------|-------------------|----------|--|
| 1.8 | Is the slope of the accessible parking spaces and access aisles no steeper than 1:48 in all directions? [502.4] | Yes No Measurement: | | Photo #: | Regrade surface |
| 1.9 | Do the access aisles adjoin an accessible route? [502.3] | Yes No | | Photo #: | Create accessible route Relocate accessible space |
| 1.10 | Are accessible spaces identified with a sign that includes the International Symbol of Accessibility? Is the bottom of the sign at least 60 inches above the ground? [502.6] Note: The International Symbol of Accessibility is not required | Yes No | 60"min | Dhata # | Install signs |
| | on the ground. | | | Photo #: | |

| 1.11 | Are there signs reading "van accessible" at van accessible spaces? [502.6] | Yes No | VAN ACCESSBLE | Photo #: | Install signs |
|-------|--|------------------------|------------------|----------|--|
| 1.12 | Of the total parking spaces, are the accessible spaces located on the closest accessible route to the accessible entrance(s)? [208.3.1] Note: If parking serves multiple entrances, accessible parking should be dispersed. | Yes No | | Photo #: | Reconfigure spaces |
| Exter | ior Accessible Route | | | | |
| 1.13 | Is the route stable, firm and slip-resistant? [302.1] | Yes No | | Photo #: | Repair uneven paving Fill small bumps and breaks with patches Replace gravel with asphalt or other surface |
| 1.14 | Is the route at least 36 inches wide? [403.5.1] | Yes No Measurement: | 36"min | | Change or move landscaping, furnishings or other items Widen route |


| | Note: The accessible route can narrow to 32 inches min. for a max. of 24 inches. These narrower portions of the route must be at least 48 inches from each other. | | 424"max+ 32"min 32"min 32"min | | |
|----|--|----------------------------------|--|----------|---|
| | | | | Photo #: | |
| 15 | If the route is greater than 200 feet in length and less than 60 inches wide, is there a passing space no less than 60 x 60 inches? [403.5.3] | Yes No Measurement: | 36"min 60"min 60"min | Photo #: | Widen route for passing space |
| 16 | If there are grates or openings on the route, are the openings no larger than ½ inches? Is the long dimension perpendicular to the dominant direction of travel? [302.3] | Yes No Measurement: Yes No | | | Replace or move grate |
| | [302.3] | | | Photo #: | |
| 17 | Is the running slope no steeper than 1:20, i.e. for every inch of height change there are at least 20 inches of route run? [403.3] | Yes No Measurement: | | | Regrade to 1:20 max. |
| | Note: If the running slope is steeper than 1:20, treat as a ramp and add features such as edge protection and handrails. | | | Photo #: | |

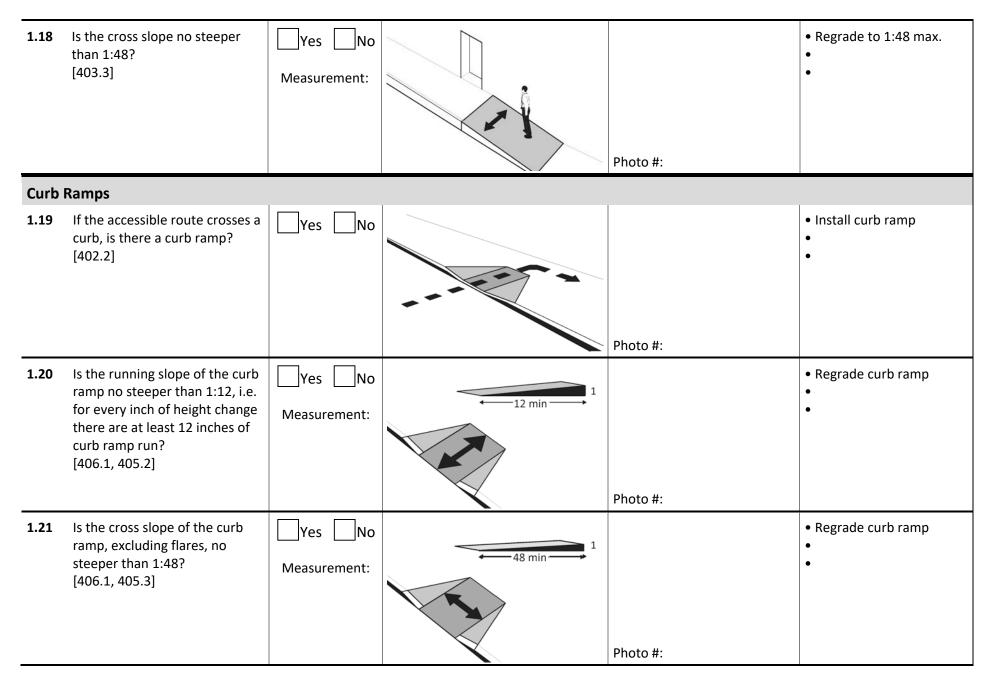

www.ADAchecklist.org

| 1.22 | Is the curb ramp, excluding flares, at least 36 inches wide? [406.1, 405.5] | Yes No Measurement: | 36"min | Photo #: | • Widen curb ramp • |
|------|--|--|------------------------------|----------|---|
| 1.23 | At the top of the curb ramp is there a level landing (slope no steeper than 1:48 in all directions) that is at least 36 inches long and at least as wide as the curb ramp? [406.4] If there are curb ramp flares, are the slopes of the flares no steeper than 1:10, i.e. for every inch of height change there are at least 10 inches of flare run? [406.3] | Yes No Measurement: Yes No Measurement: | 36"min 36"min 10 min 1 | Photo #: | Reconfigure Add ramp flares |
| 1.24 | If the landing at the top is less than 36 inches long, are there curb ramp flares? Are the slopes of the flares no greater than 1:12, i.e. for every inch of height change there are at least 12 inches of flare run? [406.4] | Yes No Yes No Measurement: | | Photo #: | Add ramp flares Regrade flares |

| Ram | Ramps If any portion of the accessible route is steeper than 1:20, it should be treated as a ramp. | | | | | |
|------|--|------------------------|-------------|----------|--|--|
| 1.25 | If there is a ramp is it at least 36 inches wide? [405.5] Note: If there are handrails, measure between the handrails. | Yes No Measurement: | 36"min | Photo #: | Alter ramp | |
| 1.26 | Is the surface stable, firm and slip resistant? [405.4] | Yes No | | Photo #: | Resurface ramp | |
| 1.27 | For each section of the ramp, is the running slope no greater than 1:12, i.e. for every inch of height change there are at least 12 inches of ramp run? [405.2] Note: Rises no greater than 3 inches with a slope no steeper than 1:8 and rises no greater than 6 inches with a slope no steeper than 1:10 are permitted when such slopes are necessary due to space limitations. | Yes No Measurement: | 1 12 min | Photo #: | Relocate ramp Lengthen ramp to decrease slope | |

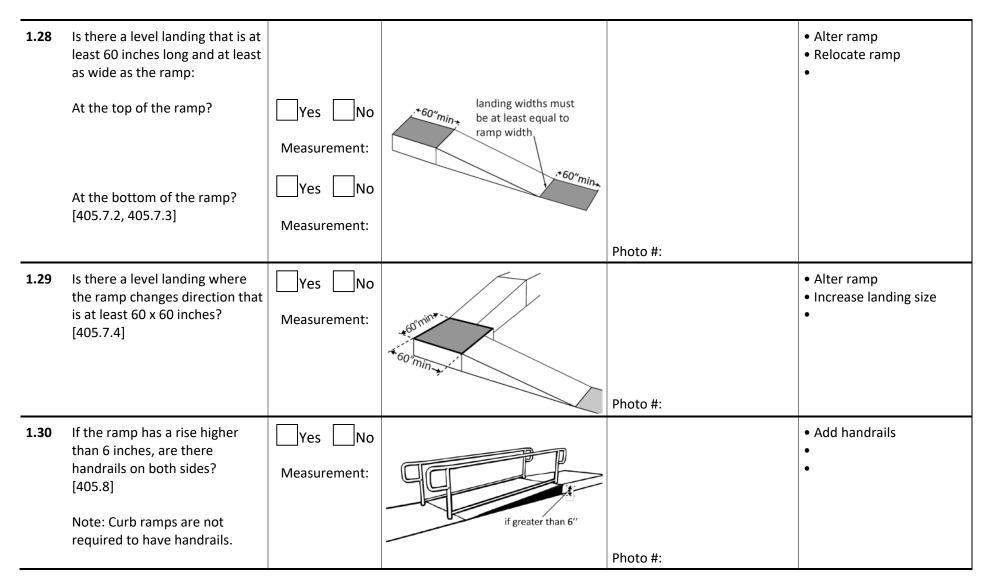


| 1.31 | Is the top of the handrail gripping surface no less than 34 inches and no greater than 38 inches above the ramp surface? [505.4] | Yes No Measurement: | 34"-38" | | Reconfigure or replace handrails Adjust handrail height |
|------|---|----------------------------------|-------------------|----------------------|---|
| 1.32 | Is the handrail gripping surface continuous and not obstructed along the top or sides? [505.3] If there are obstructions, is the bottom of the gripping surface obstructed no greater than 20%? [505.6] | Yes No Yes No Measurement: | | Photo #: Photo #: | Reconfigure or replace handrails |
| 1.33 | If the handrail gripping surface is circular, is it no less than 1 ¼ inches and no greater than 2 inches in diameter? [505.7.1] | Yes No Measurement: | •1½-2" | Photo #: | Replace handrails |
| 1.34 | If the handrail gripping surface is non-circular: Is the perimeter no less than 4 inches and no greater than 6¼ inches? | Yes No Measurement: | 4"-6 ¼" perimeter | | Replace handrails |


| | | | | | 1 |
|------|---|--|--------------|----------|--|
| | Is the cross section no greater than 2¼ inches? [505.7.2] | | | Photo #: | |
| 1.35 | Does the handrail: | | | | Alter handrails |
| | Extend at least 12 inches horizontally beyond the top and bottom of the ramp? | Yes No Measurement: | P. D. | | • |
| | Return to a wall, guard, or landing surface? [505.10.1] | Yes No | 12" | | |
| | Note: If a 12 inch extension would be a hazard (in circulation path) it is not required. | | min | Photo #: | |
| 1.36 | To prevent wheelchair casters and crutch tips from falling off: | | | | Add curbAdd barrier |
| | Does the surface of the ramp extend at least 12 inches beyond the inside face of the handrail? Or Is there a curb or barrier that prevents the passage of a 4- inch diameter sphere? | Yes No Measurement: Yes No Measurement: | less than 4" | | • Extend ramp width • |
| | [405.9.1, 405.9.2] | | | Photo #: | |

| Entra | nce | | | | |
|-------|---|--------|------------------------|----------|--|
| 1.37 | Is the main entrance accessible? | Yes No | | Photo #: | Redesign to make it accessible |
| 1.38 | If the main entrance is not accessible, is there an alternative accessible entrance? Can the alternative accessible entrance be used independently and during the same hours as the main entrance? | Yes No | | Photo #: | Designate an entrance and make it accessible Ensure that accessible entrance can be used independently and during the same hours as the main entrance |
| 1.39 | Do all inaccessible entrances have signs indicating the location of the nearest accessible entrance? [216.6] | Yes No | ACCESSIBLE ENTRANCE | Photo #: | Install signs Install signs on route before people get to inaccessible entrances so that people do not have to turn around and retrace route |
| 1.40 | If not all entrances are accessible, is there a sign at the accessible entrance with the International Symbol of Accessibility? [216.6] | Yes No | G | Photo #: | • Install sign • • |

| 1.41 | Is the clear opening width of the accessible entrance door at least 32 inches, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3] | Yes No Measurement: | 32" min 90° | Photo #: | Alter door Install offset hinges |
|------|---|--|------------------|----------|---|
| 1.42 | If there is a front approach to the pull side of the door, is there at least 18 inches of maneuvering clearance beyond the latch side plus at least 60 inches clear depth? Note: See 2010 Standards 404.2.4 for maneuvering clearance requirements on the push side of the door and side approaches to the pull side of the door On both sides of the door, is the ground or floor surface of the maneuvering clearance level (no steeper than 1:48)? [404.2.4] | Yes No Measurement: Yes No Measurement: | 60'' min t | Photo #: | Remove obstructions Reconfigure walls Add automatic door opener |
| 1.43 | If the threshold is vertical is it no more than ¼ inch high? Or No more than ½ inch high with the top ¼ inch beveled no steeper than 1:2, if the threshold was installed on or | Yes No Measurement: Yes No Measurement: | 1/4" max | | Remove or replace threshold |

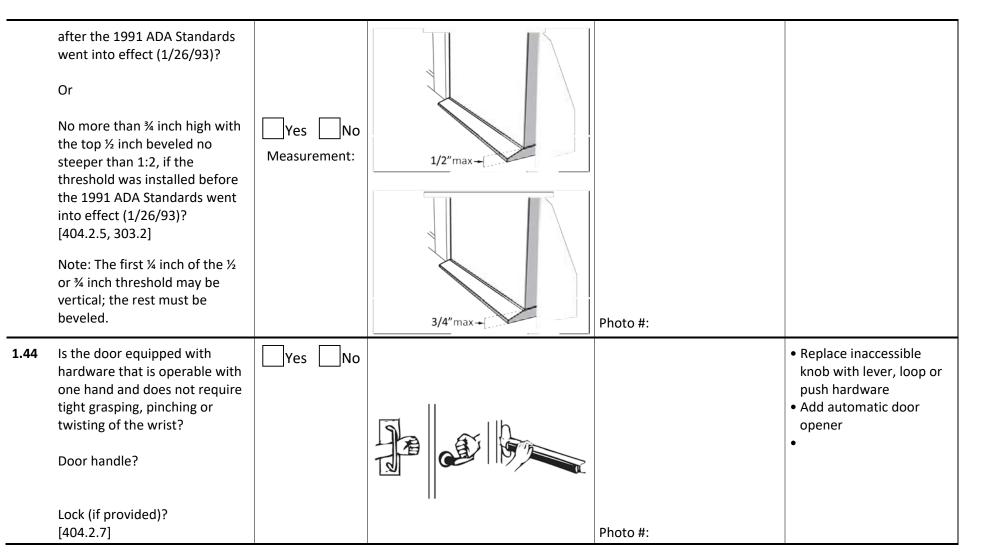


| 1.45 | Are the operable parts of the door hardware no less than 34 inches and no greater than 48 inches above the floor or ground surface? [404.2.7] | Yes No Measurement: | ● 34"- 48" | Photo #: | Change hardware height |
|------|--|------------------------|----------------------|----------|--|
| 1.46 | If the door has a closer, does it take at least 5 seconds to close from an open position of 90 degrees to a position of 12 degrees from the latch? [404.2.8] | Yes No Measurement: | 90° 5 sector | Photo #: | Adjust closer |
| 1.47 | If there are two doors in a series, e.g. vestibule, is the distance between the doors at least 48 inches plus the width of the doors when swinging into the space? [404.2.6] | Yes No Measurement: | 48''min $+$ | | Remove inner door Change door swing |

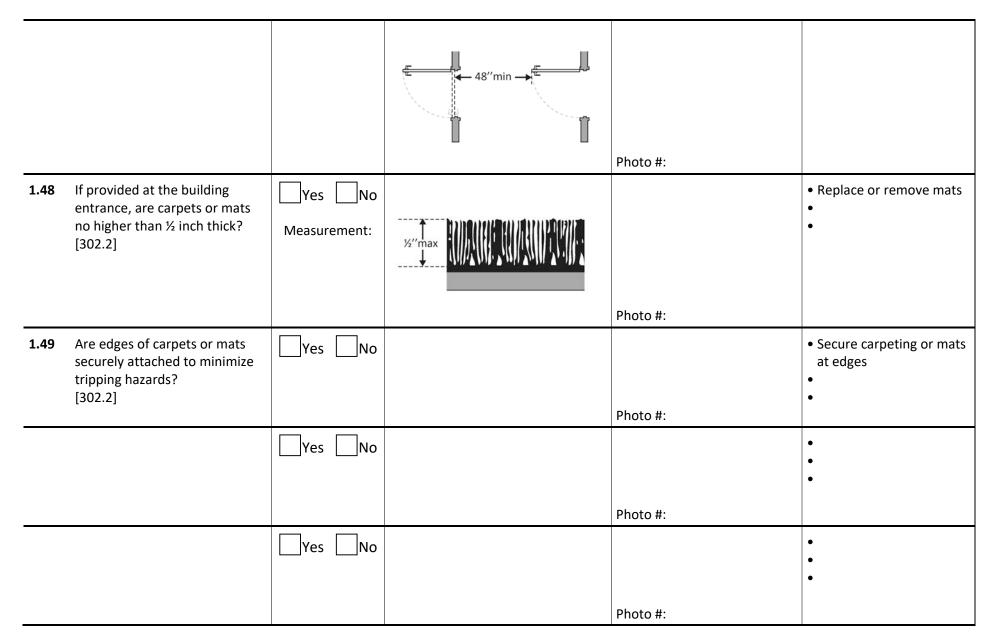

ADA Checklist for Existing Facilities

Priority 2 – Access to Goods & Services

Based on the 2010 ADA Standards for Accessible Design

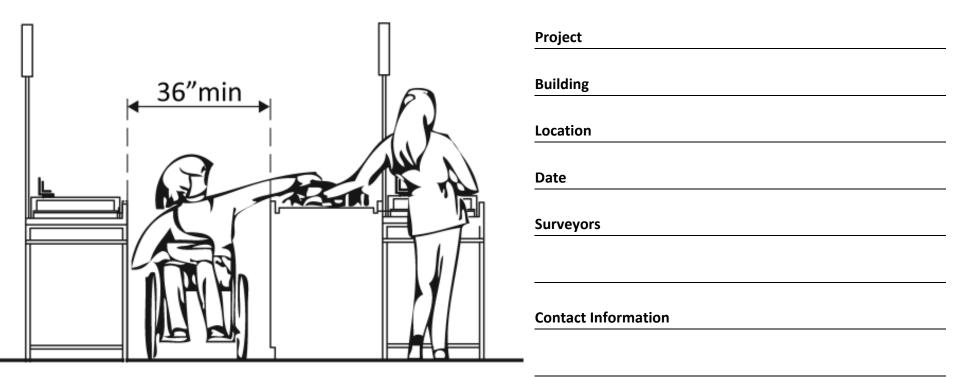

The layout of the building should allow people with disabilities to obtain goods and services and to participate in activities without assistance.



Institute for Human Centered Design www.HumanCenteredDesign.org

Copyright © 2016



ADA National Network Questions on the ADA 800-949-4232 voice/tty

www.ADAchecklist.org

This checklist was produced by the New England ADA Center, a project of the Institute for Human Centered Design and a member of the ADA National Network. This checklist was developed under a grant from the Department of Education, NIDRR grant number H133A060092-09A. However the contents do not necessarily represent the policy of the Department of Education, and you should not assume endorsement by the Federal Government.

Questions or comments on the checklist contact the New England ADA Center at 617-695-0085 voice/tty or ADAinfo@NewEnglandADA.org

For the full set of checklists, including the checklists for recreation facilities visit www.ADAchecklist.org.


Copyright © 2016 ADA Checklist for Existing Materials. You can freely reproduce and distribute this content. Include proper attribution. But you must get permission before using this content as a fee-based product.

| Prio | ority 2 – Access to Goods a | & Services | | Comments | Possible Solutions |
|-------|---|------------------------|---|----------|---|
| 2.1 | Does the accessible entrance provide direct access to the main floor, lobby and elevator? [See 2010 ADA Standards for Accessible Design – 206.4] | Yes No | | Photo #: | Create accessible route |
| Inter | ior Accessible Route | | | | |
| 2.2 | Are all public spaces on at least one accessible route? [206.2.4] | Yes No | | Photo #: | Create accessible route |
| 2.3 | Is the route stable, firm and slip-resistant? [40.2, 302.1] | Yes No | | Photo #: | Repair uneven surfaces |
| 2.4 | Is the route at least 36 inches wide? [403.5.1] Note: The accessible route can narrow to 32 inches min. for a max. of 24 inches. These narrower portions of the route must be at least 48 inches from each other. | Yes No Measurement: | 36"min 424"max+ 48"min 48"min 24"max+ 32"min 32"min 32"min | | • Widen route • |
| | | | | Photo #: | |

| 2.5 | If the route is greater than 200 feet in length and less than 60 inches wide, is there a passing space no less than 60 x 60 inches? [403.5.3] | Yes No Measurement: | 36"min 60"min 60"min | Photo #: | Widen route for passing space |
|-----|---|------------------------|----------------------------|----------|---|
| 2.6 | Is the running slope no steeper than 1:20, i.e. for every inch of height change there are at least 20 inches of route run? [403.3] Note: If the running slope is steeper than 1:20, treat as a ramp and add features such as edge protection and handrails. | Yes No Measurement: | | Photo #: | • Regrade • |
| 2.7 | Is the cross slope no steeper than 1:48? [403.3] | Yes No Measurement: | | Photo #: | • Regrade • |
| 2.8 | Do all objects on circulation paths through public areas, e.g. fire extinguishers, drinking fountains, signs, etc., protrude no more than 4 inches into the path? Or | Yes No Measurement: | 4"max Or | | Remove object Add tactile warning such as permanent planter or partial walls |

| | If an object protrudes more than 4 inches, is the bottom leading edge at 27 inches or lower above the floor? [307.2] Or Is the bottom leading edge at 80 inches or higher above the floor? [307.4] | Yes No Measurement: Yes No Measurement: | Or BATHROOM 4" 80"min | Photo #: | |
|-----|---|--|--------------------------------|----------|---|
| 2.9 | Are there elevators or platform lifts to all public stories? Note: Vertical access is not required in new construction or alterations if a facility is less than three stories or has less than 3,000 square feet per story, unless the facility is a shopping center, shopping mall, professional office of a health care provider, transportation terminal, state facility or local government facility | Yes No | | Photo #: | Install if necessary Offer goods and services on an accessible story |

| Ramp | DS | | | | |
|------|---|------------------------|-------------|----------|--|
| 2.10 | If there is a ramp, is it at least 36 inches wide? [405.5] Note: If there are handrails, measure between the handrails. | Yes No Measurement: | 36"min | Photo #: | • Alter ramp • |
| 2.11 | Is the surface stable, firm and slip resistant? [405.4] | Yes No | | Photo #: | Resurface ramp |
| 2.12 | For each section of the ramp, is the running slope no greater than 1:12, i.e. for every inch of height change there are at least 12 inches of ramp run? [405.2] Note: Rises no greater than 3 inches with a slope no steeper than 1:8 and rises no greater than 6 inches with a slope no steeper than 1:10 are permitted when due to space limitations. | Yes No Measurement: | 1 12 min | Photo #: | Lengthen ramp to decrease slope Relocate ramp |

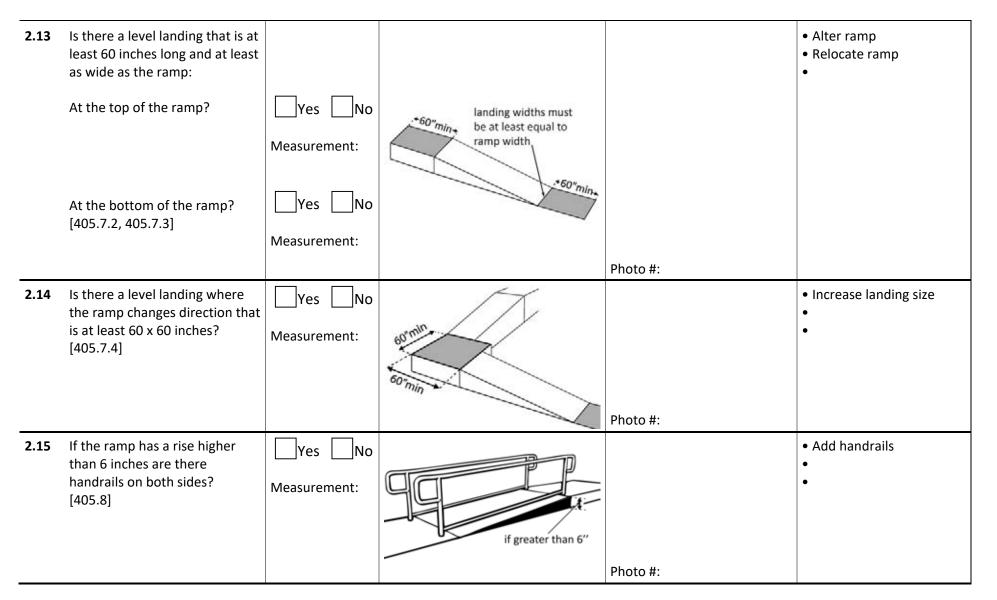

| 2.16 | Is the top of the handrail gripping surface no less than 34 inches and no greater than 38 inches above the ramp surface? [505.4] | Yes No Measurement: | 34"-38" | | Adjust handrail height |
|------|---|------------------------|-------------------|----------|--|
| | | | | Photo #: | |
| 2.17 | Is the handrail gripping surface continuous and not obstructed along the top or sides? [505.3] If there are obstructions, is the bottom of the gripping surface obstructed no more than 20%? [505.6] | Yes No | | | Reconfigure or replace handrails |
| | | | | Photo #: | |
| 2.18 | If the handrail gripping surface is circular, is it no less than 1 ¼ inches and no greater than 2 inches in diameter? [505.7.1] | Yes No Measurement: | •1%-2" | Photo #: | Replace handrails |
| 2.19 | If the handrail gripping surface is non-circular: Is the perimeter no less than 4 inches and no greater than 6¼ inches? | Yes No Measurement: | 4"-6 ¼" perimeter | | Replace handrails |

| | Is the cross section no greater than 2¼ inches? [505.7.2] | Yes No Measurement: | | Photo #: | |
|------|---|--|------------------------|----------|--|
| 2.20 | Does the handrail: Extend at least 12 inches horizontally beyond the top and bottom of the ramp? Return to a wall, guard, or landing surface? [505.10.1] Note: If a 12" extension would be hazardous (in circulation path), it is not required. | Yes No Measurement: | 12" min | Photo #: | Alter handrails |
| 2.21 | To prevent wheelchair casters and crutch tips from falling off: Does the surface of the ramp extend at least 12 inches beyond the inside face of the handrail? Or Is there a curb or barrier that prevents the passage of a 4- inch diameter sphere? [405.9.1, 405.9.2] | Yes No Measurement: Yes No Measurement: | 12"min less than 4" | Photo #: | Add curb Add barrier Extend ramp width |


| 2.22 | If there is a full size or LULA elevator, are the call buttons no higher than 54 inches above the floor? [407.2.1.1] | Yes No Measurement: | 54"max | Photo #: | Change call button height |
|------|--|---------------------------|---|----------|---|
| 2.23 | If there is a full size or LULA elevator, does the sliding door reopen automatically when obstructed by an object or person?* [407.3.3] | Yes No | | Photo #: | * If constructed before 3/15/2012 and manually operated, the door is not required to reopen automatically Install opener |
| 2.24 | If there is a LULA elevator with a swinging door: Is the door power- operated? Does the door remain open for at least 20 seconds when activated? [403.3.2] | Yes No Yes No Time: | | Photo #: | Add power operated door Adjust opening time |
| 2.25 | If there is a full size elevator: Is the interior at least 54 inches deep by at least 36 inches wide with at least 16 sq. ft. of clear floor area? Is the door opening width at | Yes No Measurement: | ← 36"min→ 16 sq.ft.min ← 32"min → ↓ | | Replace elevator |

| | least 32 inches? [407.4.1 Exception] | Measurement: | | Photo #: | |
|------|--|--|---|----------|-----------------------|
| 2.26 | If there is a LULA elevator, is the interior: | | | | Replace elevator |
| | At least 51 inches deep by 51 inches wide with a door opening width of at least 36 inches? Or At least 54 inches deep by at least 36 inches wide with at least 15 sq. ft. of clear floor area and a door opening width of at least 32 inches? | Yes No Measurement: Yes No Measurement: | 51"min 51" 51" or 54" min 54" min 54" min 54" min 54" min 54" min 54" min 54" 54" min 54" 54" 54" 54" 54" 54" 54" 54" | | |
| 2.27 | [408.4.1 Exceptions 1 and 2] If there is a full size or LULA | | 1 | Photo #: | Change control height |
| | elevator, are the in-car controls: | | . | | • |
| | No less than 15 inches and no greater 48 inches above the floor? | Yes No Measurement: | 48"max | | |
| | Or | | Or | | |
| | Up to 54 inches above the floor for a parallel approach? [408.4.6, 407.4.6.1] | Yes No Measurement: | 54"max 15"min | Photo #: | |

| 2.28 | If there is a LULA elevator, are the in-car controls centered on a side wall? [408.4.6] | Yes No Measurement: | | Photo #: | Reconfigure controls |
|------|--|------------------------|--|----------|--|
| 2.29 | If there is a full size or LULA elevator: Are the car control buttons designated with raised characters? Are the car control buttons designated with Braille? [407.4.7.1, 703.2] | Yes No | 5 5 5 6 6 6 6 3 6 6 3 6 4 6 6 6 6 6 6 6 6 6 6 | Photo #: | Add raised characters Add Braille |
| 2.30 | If there is a full size elevator, are there audible signals which sound as the car passes or is about to stop at a floor? [407.4.8] | Yes No | | Photo #: | Install audible signals |
| 2.31 | If there is a full size or LULA elevator: Is there a sign on both door jambs at every floor identifying the floor? Is there a tactile star on both jambs at the main entry level? Do text characters contrast | Yes No | 48"min | | Install signs Change sign height |

| | with their backgrounds? | | | | |
|--------|---|------------------------|--------|----------|---|
| | Are text characters raised? | Yes No | | | |
| | Is there Braille? | Yes No | | | |
| | Is the sign mounted between 48 inches to the baseline of the lowest character and 60 inches to the baseline of the highest character above the floor?* | Yes No Measurement: | | | * If constructed before 3/15/2012 and mounted no higher than 60 inches to the centerline of the sign, relocation is not |
| | [407.2.3, 408.2.3] | | | Photo #: | required |
| Diatio | orm Lifts | | | - | |
| Platte | orm Litts | | | 1 | |
| 2.32 | If a lift is provided, can it be used without assistance from others? [410.1] | Yes No | | | Reconfigure so independently operable |
| | | | - | Photo #: | |
| 2.33 | Is there a clear floor space at least 30 inches wide by at least 48 inches long for a person using a wheelchair to approach and reach the controls to use the lift? [410.5] | Yes No Measurement: | 18"min | | Remove obstructions |
| | | | 48"min | Photo #: | |

| 2.34 | Are the lift controls no less than 15 inches and no greater than 48 inches above the floor? [410.5] | Yes No Measurement: | 15"-48" | Photo #: | Change control height |
|------|---|------------------------|--------------------|----------|---|
| 2.35 | Is there a clear floor space at least 36 inches wide by at least 48 inches long inside the lift? [410.3] | Yes No Measurement: | 36 "min 48" min | Photo #: | Replace lift |
| 2.36 | If there is an end door, is the clear opening width at least 32 inches? [410.6] | Yes No Measurement: | 32"min | Photo #: | • Alter door width • |
| 2.37 | If there is a side door, is the clear opening width at least 42 inches? [410.6] | Yes No Measurement: | 42‴min | Photo #: | • Alter door width • |

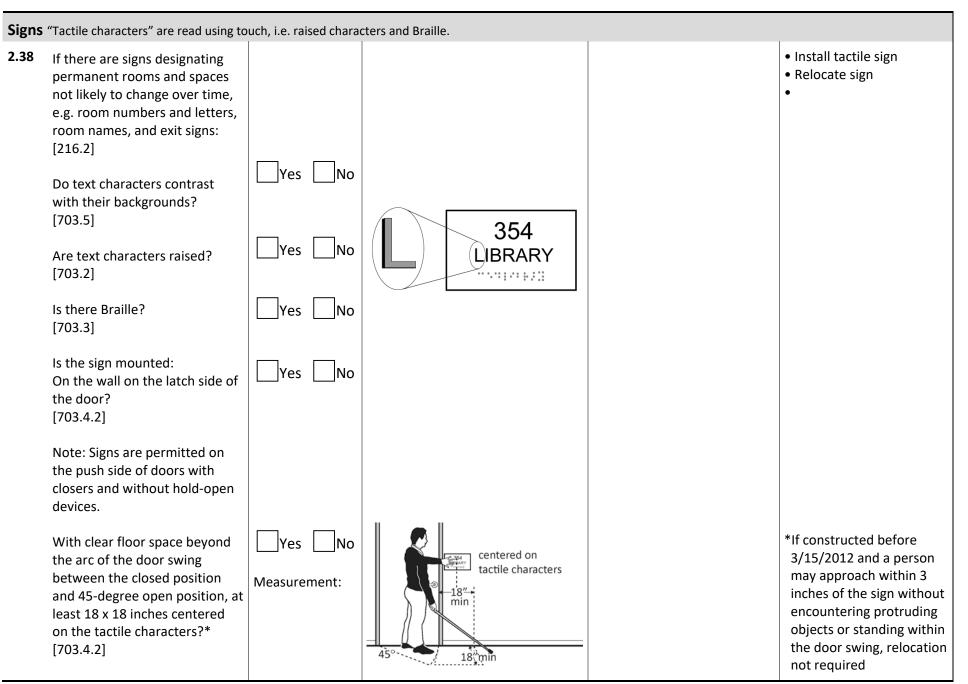


Institute for Human Centered Design © 2016

www.ADAchecklist.org


| | So the baseline of the lowest character is at least 48 inches above the floor and the baseline of the highest character is no more than 60 inches above the floor? * [703.4.1] Note: If the sign is at double doors with one active leaf, the sign should be on the inactive leaf; if both leaves are active, the sign should be on the wall to the right of the right leaf. | Yes No Measurement: | 60"max 48"min | Photo #: | *If constructed before 3/15/2012 and mounted no higher than 60 inches to the centerline of the sign, relocation not required |
|------|--|------------------------|------------------|----------|---|
| 2.39 | If there are signs that provide direction to or information about interior spaces: | | | | Install signs with contrasting characters Change sign height |
| | Do text characters contrast with their backgrounds? [703.5.1] | Yes No | | | • |
| | Is the sign mounted so that characters are at least 40 inches above the floor? [703.5.6] | Yes No | 40"min | | |
| | Note: Raised characters and Braille are not required. | | | Photo #: | |


| Interior Doors – to classrooms, medical exam rooms, conference rooms, etc. | | | | | | | | |
|--|--|--|-----------------|----------|---|--|--|--|
| 2.40 | Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3] | Yes No Measurement: | 32″ min→ 90° | Photo #: | Install offset hinges Alter the doorway | | | |
| 2.41 | If there is a front approach to the pull side of the door, is there at least 18 inches of maneuvering clearance beyond the latch side plus at least 60 inches clear depth? Note: See 2010 Standards 404.2.4 for maneuvering clearance requirements on the push side of the door and side approaches to the pull side of the door. On both sides of the door, is the floor surface of the maneuvering clearance level (no steeper than 1:48)? [404.2.4] | Yes No Measurement: Yes No Measurement: | 60" min | Photo #: | Remove obstructions Reconfigure walls Add automatic door opener | | | |

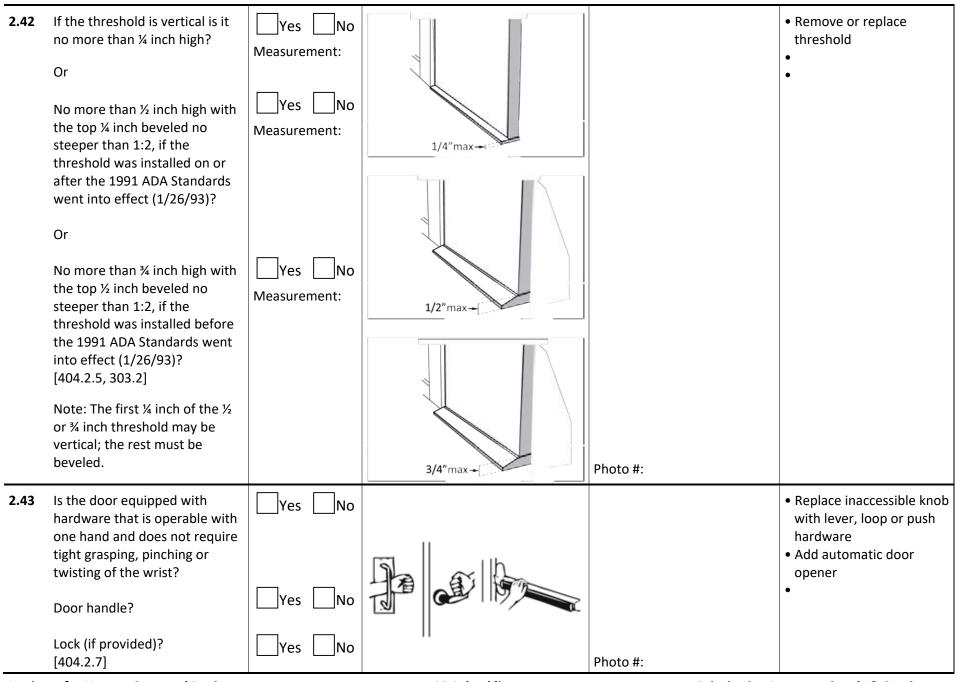

Institute for Human Centered Design © 2016

| 2.44 | Are the operable parts of the hardware no less than 34 inches and no greater than 48 inches above the floor? [404.2.7] | Yes No Measurement: | ■ 34"- 48" | Photo #: | Change hardware height |
|------|---|------------------------|----------------------|----------|--|
| 2.45 | Can the door be opened easily (5 pounds maximum force)? [404.2.9] Note: You can use a pressure gauge or fish scale to measure force. If you do not have one you will need to judge whether the door is easy to open. | Yes No Measurement: | 5 lbf | Photo #: | Adjust or replace closers Install lighter doors Install power-assisted or automatic door openers |
| 2.46 | If the door has a closer, does it take at least 5 seconds to close from an open position of 90 degrees to a position of 12 degrees from the latch? [404.2.8.1] | Yes No | 90° 5 see n | Photo #: | • Adjust closer • • |
| Roon | ns and Spaces – stores, superi | markets, libraries | , etc. | | |
| 2.47 | Are aisles and pathways to goods and services, and to one of each type of sales and service counters, at least 36 inches wide? [403.5.1] | Yes No | | Photo #: | Rearrange goods, equipment and furniture |

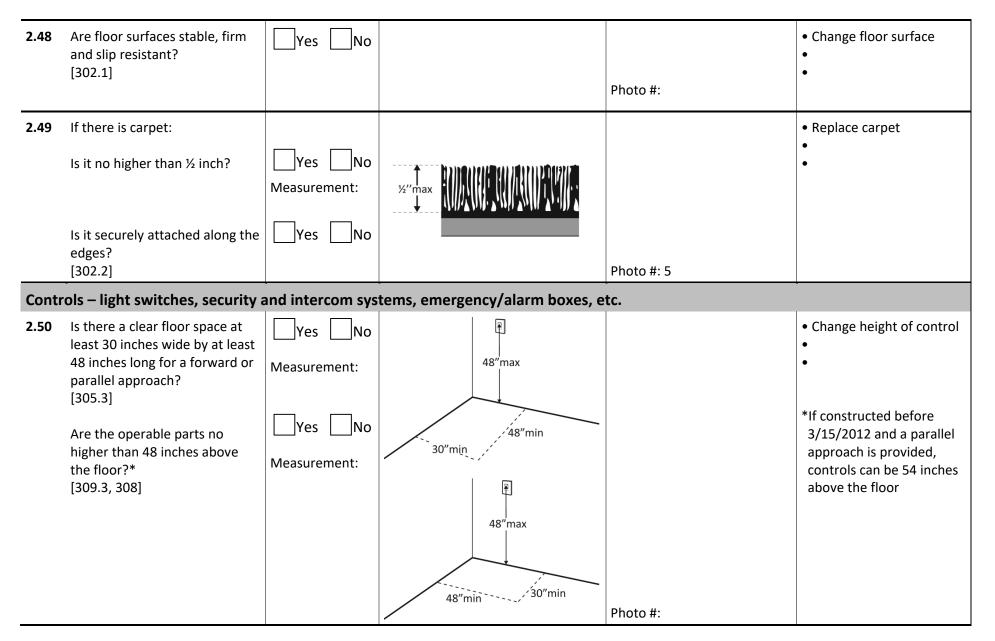

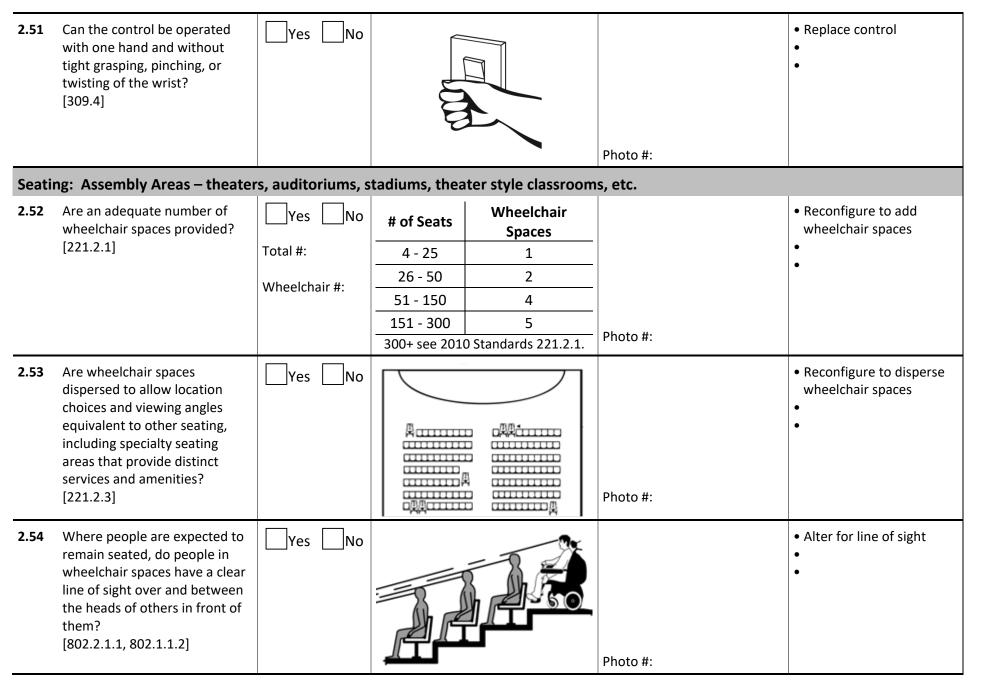


| 2.55 | Where people are expected to stand, do people in wheelchair spaces have a clear line of sight over and between the heads of others in front of them? [802.2.2.1, 802.1.2.2] | Yes No | | Photo #: | Alter for line of sight |
|------|--|------------------------|------------------|----------|---|
| 2.56 | If there is a single wheelchair space, is it at least 36 inches wide? [802.1.2] | Yes No Measurement: | 36" min | Photo #: | Alter space |
| 2.57 | If there are two adjacent wheelchair spaces, are they each at least 33 inches wide? [802.1.2] | Yes No Measurement: | →33"min→→33"min→ | Photo #: | Alter spaces |
| 2.58 | If the wheelchair space can be entered from the front or rear, is it at least 48 inches deep? [802.1.3] | Yes No Measurement: | | Photo #: | Alter space |

| 2.59 | If the wheelchair space can only be entered from the side, is it at least 60 inches deep? [802.1.3] | Yes No Measurement: | | Photo #: | Alter space |
|------|--|------------------------|--------------------|----------|--|
| 2.60 | Do wheelchair spaces adjoin, but not overlap, accessible routes? [802.1.4] | Yes No | Accessibe Route | Photo #: | Alter spaces |
| 2.61 | Is there at least one companion seat for each wheelchair space? [221.3] | Yes No | | Photo #: | Add companion seats |
| 2.62 | Is the companion seat located so the companion is shoulder- to-shoulder with the person in a wheelchair? [802.3.1] | Yes No | | Photo #: | Alter seating |
| 2.63 | Is the companion seat equivalent in size, quality, comfort and amenities to seating in the immediate area? [802.3.2] | Yes No | | Photo #: | Add equivalent seating |


| Seati | ng: At dining surfaces (restau | urants, cafeterias | , bars, etc.) and non-employee w | ork surfaces (libraries, co | onference rooms, etc.) |
|-------|--|-------------------------------------|----------------------------------|-----------------------------|---|
| 2.64 | Are at least 5%, but no fewer than one, of seating and standing spaces accessible for people who use wheelchairs? [226.1] | Yes No Total #: Wheelchair #: | | Photo #: | Alter to provide accessible spaces |
| 2.65 | Is there a route at least 36 inches wide to accessible seating? [403.5.1] | Yes No Measurement: | 36"min | Photo #: | • Widen route • • |
| 2.66 | At the accessible space(s), is the top of the accessible surface no less than 28 inches and no greater than 34 inches above the floor? [902.3] Note: If for children, the top should be no less than 26 inches and no greater than 30 inches above the floor. | Yes No Measurement: | 28"-34" | Photo #: | Alter surface height |
| 2.67 | Is there a clear floor space at least 30 inches wide by at least 48 inches long for a forward approach? | Yes No Measurement: | | | Alter table or work surface Add accessible table or work surface |


| | Is there knee space at least 27 inches high and at least 30 inches wide? [306.2, 306.3] Note: If for children, the knee space may be 24 inches high. | Yes No Measurement: | 27"min 30"min 17"- 25" | Photo #: | |
|-------|---|------------------------|--|---------------------|--|
| Seati | ng: General – reception areas | s, waiting rooms, | etc. | | |
| 2.68 | Is there at least one space at least 36 inches wide by at least 48 inches long for a person in a wheelchair? [802.1.2, 802.1.3] | Yes No Measurement: | 36"x48" | | Move furniture and equipment to provide space |
| | | - | | Photo #: | |
| | | | cooms This section does not apply t | o any other bences. | |
| 2.69 | In locker rooms, dressing rooms and fitting rooms, is there at least one room with a bench? [222.1, 803.4] | Yes No | | | • Add bench • |
| | [222.1, 003.4] | | | Photo #: | |
| 2.70 | Is there a clear floor space at least 30 inches wide by at least 48 inches long at the end of the bench and parallel to the short axis of the bench? | Yes No Measurement: | | | Move bench Replace bench Affix bench to wall |
| | Is the bench seat at least 42 inches long and no less than 20 inches and no greater than 24 | Yes No Measurement: | 48" min 30" min | | |

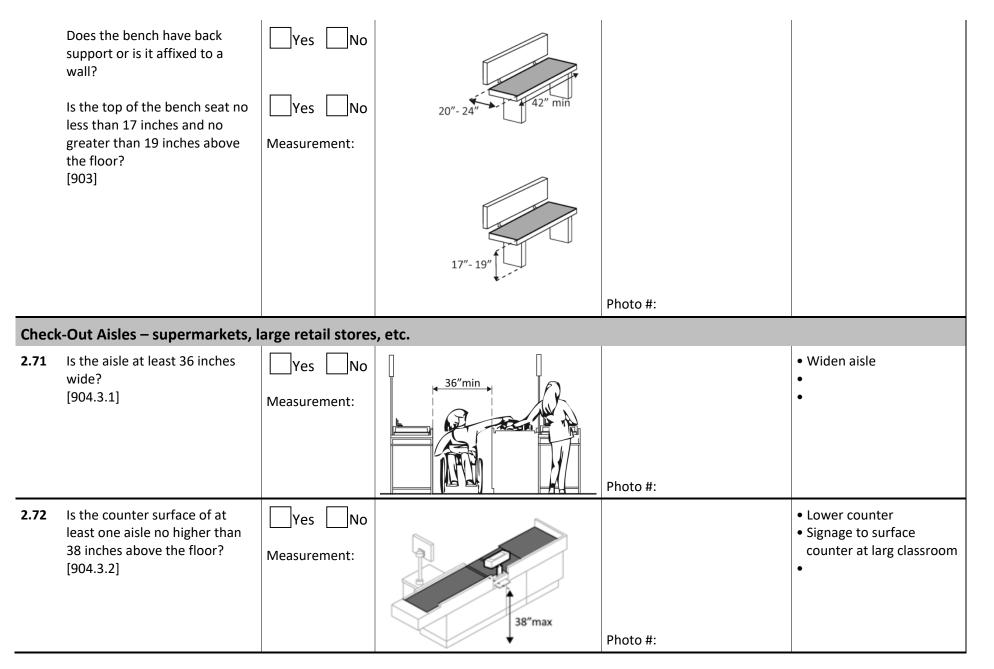



| 2.73 | Is the top of the counter edge protection no higher than 2 inches above the counter surface? [904.3.2] | Yes No Measurement: | :: ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; | Photo #: | Lower edge protection |
|-------|--|------------------------|--|----------|---|
| 2.74 | If there is a check writing surface, is the top no less than 28 inches and no greater than 34 inches above the floor? [904.3.3] | Yes No Measurement: | 28"-34" | Photo #: | Alter check writing surface Lower counter at large classroom |
| 2.75 | If there is more than one check- out aisle is there a sign with the International Symbol of Accessibility at the accessible aisle? [216.11] | Yes No | G | Photo #: | • Add sign • • |
| Sales | & Service Counters – banks, s | tores, dry cleane | rs, auto repair shops, fitness clu | bs, etc. | |
| 2.76 | Is there a portion of at least one of each type of counter that is: No higher than 36 inches above the floor? At least 36 inches long? [904.4.1] | Yes No Measurement: | 36"min 36"max | | Lower section of counter Lengthen section of counter |
| | [207.7.1] | Measurement: | | Photo #: | |

| 2.77 | Does the accessible portion of the counter extend the same depth as the counter top? [904.4] | Yes No Measurement: | | Photo #: | Alter accessible portion |
|------|--|---|--|----------|--|
| 2.78 | Is there a clear floor space at least 30 inches wide by at least 48 inches long for a forward or parallel approach? [904.4] | Yes No Parallel Measurement: Forward Measurement: | Or 30"min 0r 48"min 48"min 48"min | Photo #: | Reconfigure to provide a parallel or forward approach |
| 2.79 | For a parallel approach, is the clear floor space positioned with the 48 inches adjacent to the accessible length of counter? [904.4.1] | Yes No | 48"min | Photo #: | If a parallel approach is not possible, a forward approach is required |

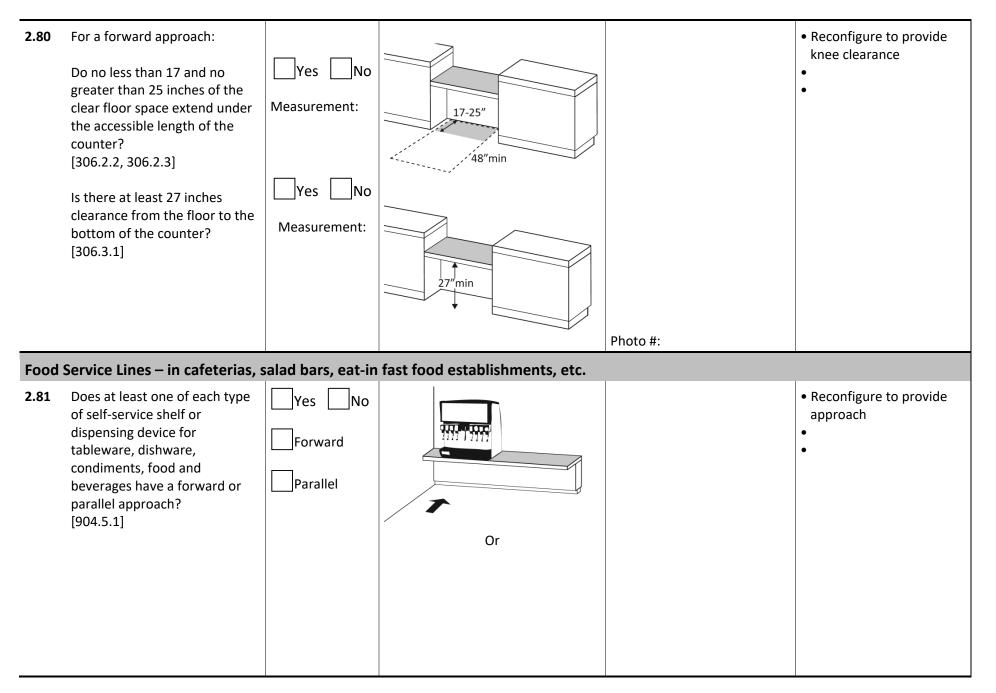

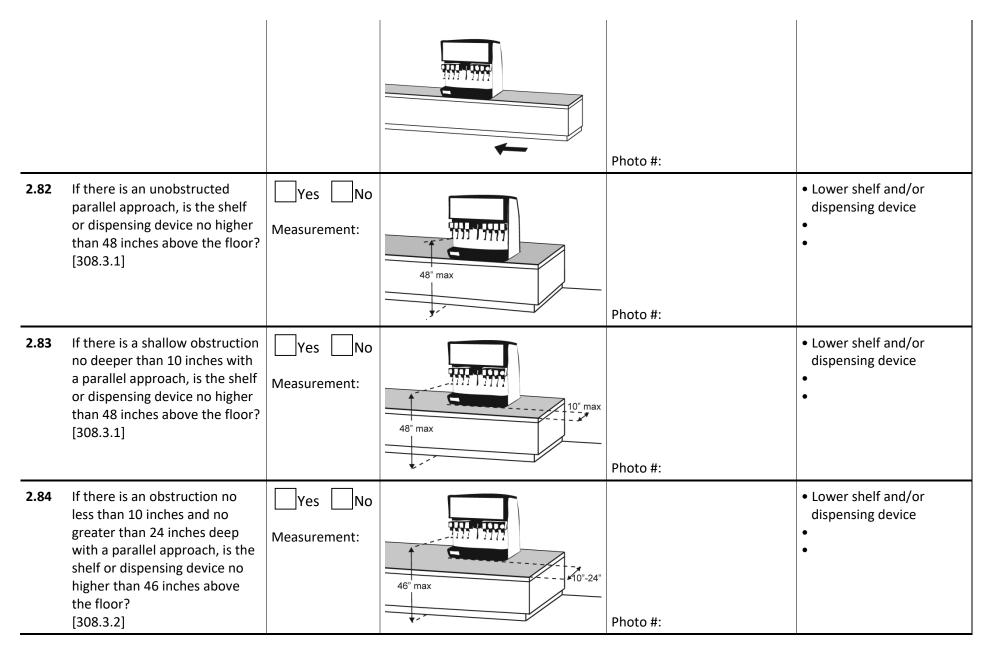

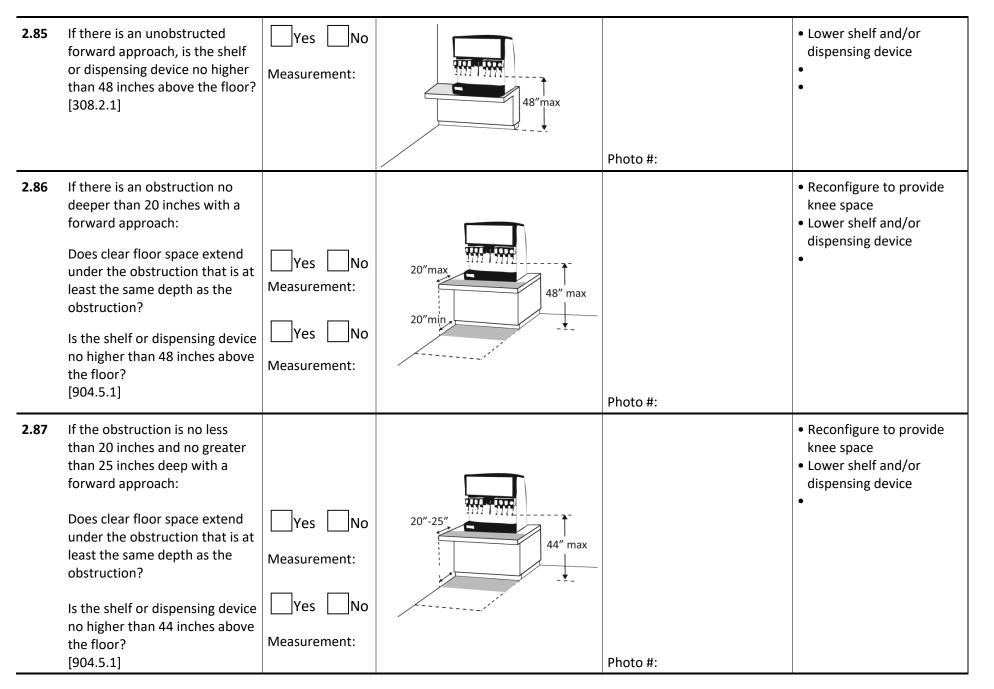

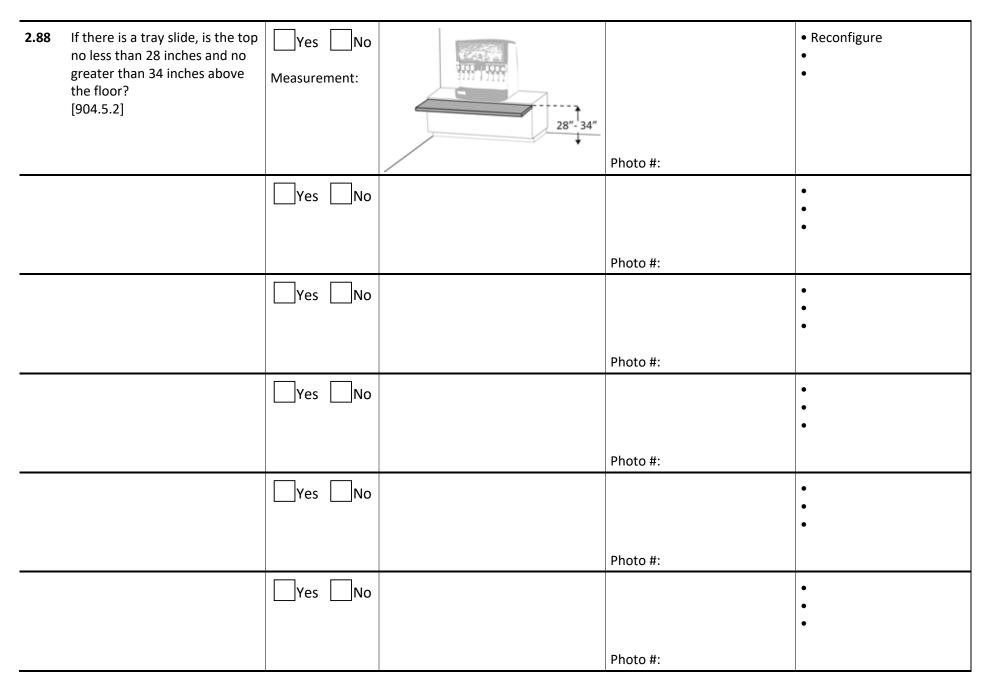

The ADA Checklist for Existing Facilities

Priority 3 - Toilet Rooms

Based on the 2010 ADA Standards for Accessible Design

| | Project |
|--|---|
| | Building |
| | Location |
| | Date |
| | Surveyors |
| | / |
| | |
| | Contact Information |
| | |
| When toilet rooms are open to the public the disabilities. | ney should be accessible to people with |
| Institute for Human Centered Design | ADA National Network Questions on the ADA 800-949-4232 voice/ttv |

Copyright © 2016

π

Questions on the ADA 800-949-4232 voice/tty


This checklist was produced by the New England ADA Center, a project of the Institute for Human Centered Design and a member of the ADA National Network. This checklist was developed under a grant from the Department of Education, NIDRR grant number H133A060092-09A. However the contents do not necessarily represent the policy of the Department of Education, and you should not assume endorsement by the Federal Government.

Questions or comments on the checklist contact the New England ADA Center at 617-695-0085 voice/tty or ADAinfo@NewEnglandADA.org

For the full set of checklists, including the checklists for recreation facilities visit www.ADAchecklist.org.

Copyright © 2016 ADA Checklist for Existing Materials. You can freely reproduce and distribute this content. Include proper attribution. But you must get permission before using this content as a fee-based product.

| Prio | rity 3 – Toilet Rooms | | | Comments | Possible Solutions |
|---------|--|--------|----------------------|----------|---|
| 3.1 | If toilet rooms are available to the public, is at least one toilet room accessible? (Either one for each sex, or one unisex.) Note: If toilet rooms are chiefly for children, e.g., in elementary schools and day care centers, use the children's specifications in Toilets - 604.1, 604.8, 604.9, 609.4 and Lavatories and Sinks – 606.2. | Yes No | | Photo #: | Reconfigure toilet room Combine toilet rooms to create one unisex accessible toilet room |
| 3.2 | Are there signs at inaccessible toilet rooms that give directions to accessible toilet rooms? [See 2010 ADA Standards for Accessible Design – 216.8] | Yes No | | Photo #: | Install signs |
| 3.3 | If not all toilet rooms are accessible, is there a sign at the accessible toilet room with the International Symbol of Accessibility? [216.8] | Yes No | E | Photo #: | Install sign |
| Acce | ssible Route | | | | |
| 3.4 | Is there an accessible route to the accessible toilet room? [206.2.4] | Yes No | | Photo #: | Alter route |
| Institu | ute for Human Centered Design | | www.ADAchecklist.org | | Priority 3 – Toilet Rooms |

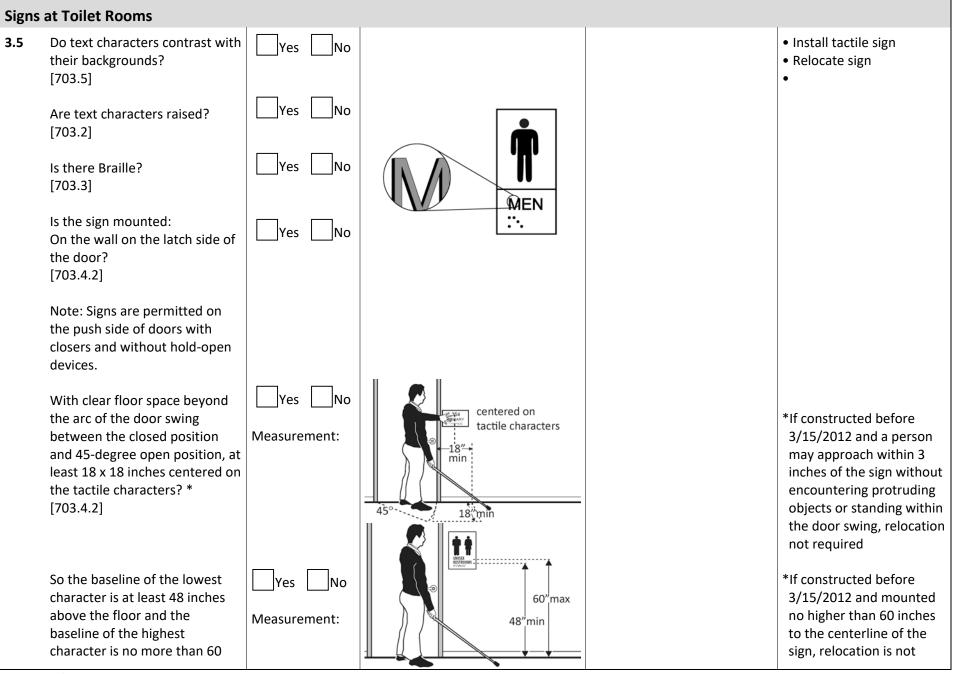


Institute for Human Centered Design © 2016


Priority 3 – Toilet Rooms


| | inches above the floor? * [703.4.1] Note: If the sign is at double doors with one active leaf, the sign should be on the inactive leaf; if both leaves are active, | | | | required |
|-------|---|------------------------|--------------|----------|---|
| | the sign should be on the wall to the right of the right. | | | Photo #: | |
| Entra | | | | | |
| 3.6 | Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3] | Yes No Measurement: | 32‴min → 90° | | Install offset hinges Alter the doorway |
| | | | | Photo #: | |
| 3.7 | If there is a front approach to the pull side of the door is there at least 18 inches of maneuvering clearance beyond the latch side plus 60 inches clear depth? Note: See 2010 Standards 404.2.4 for maneuvering clearance requirements on the push side of the door and side approaches to the pull side of the door | Yes No Measurement: | 60" min | | Remove obstructions Reconfigure walls Add automatic door opener |
| | On both sides of the door, is the floor surface of the | Yes No | | | |

Institute for Human Centered Design © 2016

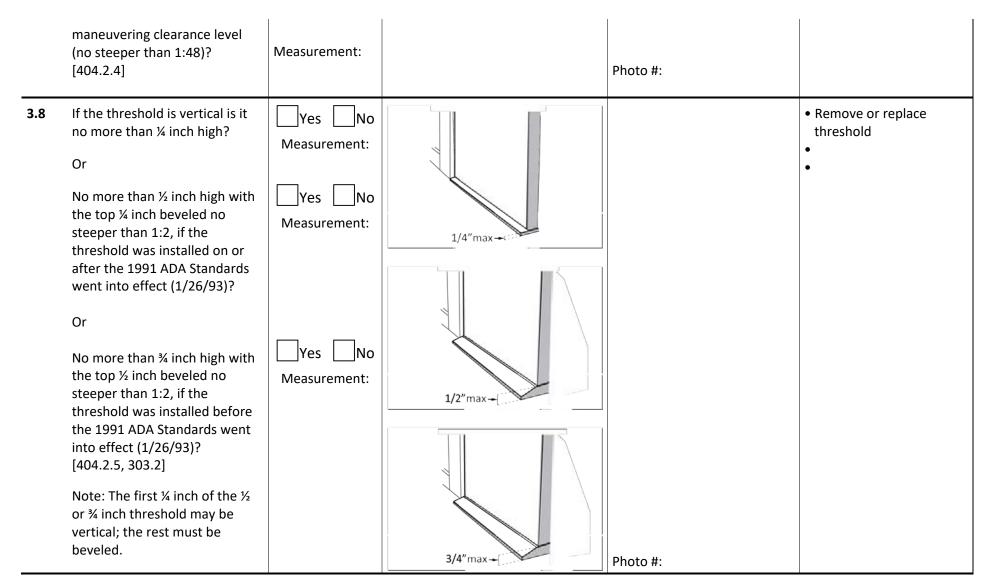

| 3.9 | Is the door equipped with hardware that is operable with one hand and does not require tight grasping, pinching or twisting of the wrist? Door handle? Lock (if provided)? [404.2.7] | Yes No | | Photo #: | Replace inaccessible knob with lever, loop or push hardware Add automatic door opener • |
|------|---|------------------------|----------------------|----------|--|
| 3.10 | Are the operable parts of the door hardware mounted no less than 34 inches and no greater than 48 inches above the floor? [404.2.7] | Yes No Measurement: | <i>∎</i> 34"- 48" | Photo #: | Change hardware height |
| 3.11 | Can the door be opened easily (5 pounds maximum force)? [404.2.9] Note: You can use a pressure gauge or fish scale to measure force. If you do not have one you will need to judge whether the door is easy to open. | Yes No Measurement: | 5 lbf | Photo #: | Adjust or replace closers Install lighter doors Install power-assisted or automatic door openers |

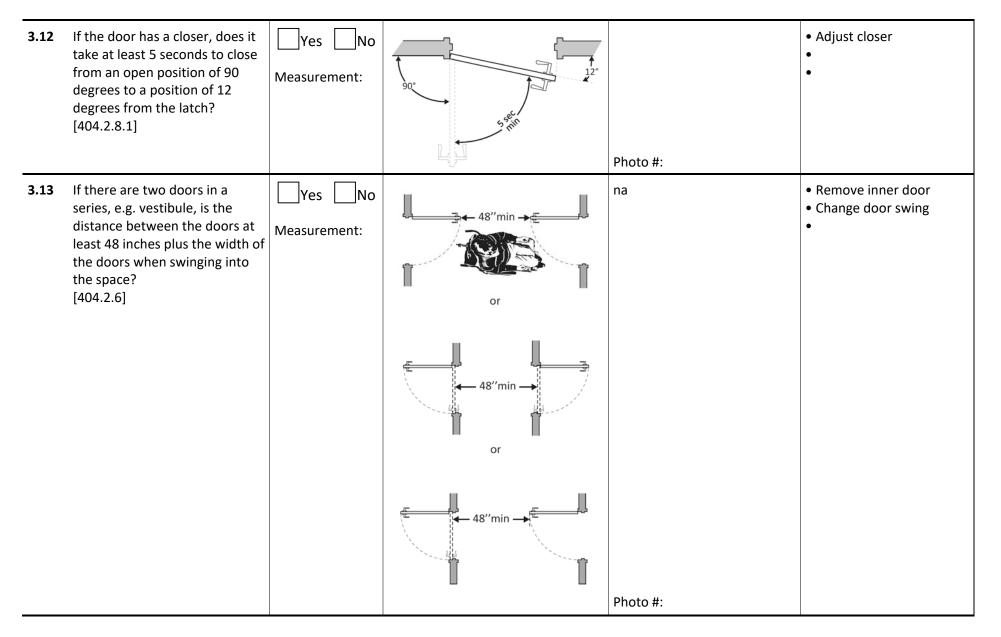


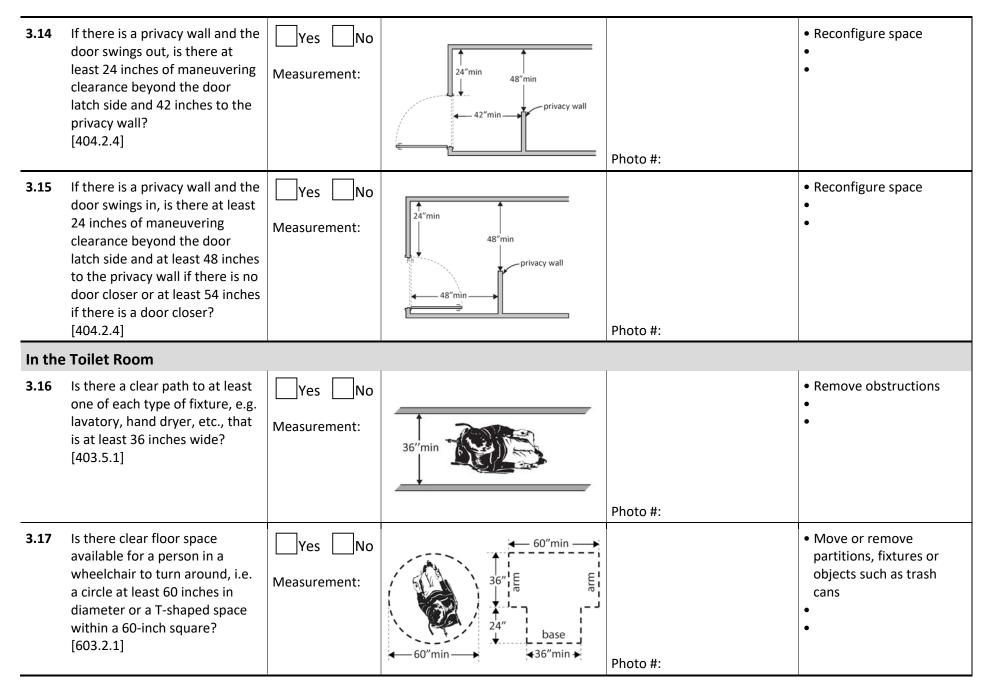



| 3.18 | In a single user toilet room if the door swings in and over a clear floor space at an accessible fixture, is there a clear floor space at least 30 x 48 inches beyond the swing of the door? [603.2.3 Exception 2] | Yes No Measurement: | | Photo #: | Reverse door swing Alter toilet room |
|------|--|--|------------------|----------|---|
| 3.19 | If the mirror is over a lavatory or countertop, is the bottom edge of the reflecting surface no higher than 40 inches above the floor? Or If the mirror is not over the lavatory or countertop, is the bottom edge of the reflecting surface no higher than 35 inches above the floor?* [603.3] | Yes No Measurement: Yes No Measurement: | - | Photo #: | * If installed before 3/15/2012 and the bottom edge of the reflecting surface is no higher than 40 inches above the floor, lowering the mirror to 35 inches is not required Lower the mirror Add another mirror |
| 3.20 | If there is a coat hook, is it no less than 15 inches and no greater than 48 inches above the floor?* [603.4] | Yes No Measurement: | 48"max 15"min | Photo #: | Adjust hook Replace with or provide additional accessible hook If installed before 3/15/2010 and the clear floor space allows a parallel approach, the coat hook may be 54 inches above the floor. |


| Lavat | t ories The 2010 Standards refer to si | nks in toilet rooms as | lavatories. | | |
|-------|--|------------------------|------------------|----------|--|
| 3.21 | Does at least one lavatory have a clear floor space for a forward approach at least 30 inches wide and 48 inches long? [606.2] | Yes No Measurement: | 48"min 30"min | Photo #: | Alter lavatory Replace lavatory |
| 3.22 | Do no less than 17 inches and no greater than 25 inches of the clear floor space extend under the lavatory so that a person using a wheelchair can get close enough to reach the faucet? [306.2] | Yes No Measurement: | 48″ → | Photo #: | Alter lavatory Replace lavatory |
| 3.23 | Is the front of the lavatory or counter surface, whichever is higher, no more than 34 inches above the floor? [606.3] | Yes No Measurement: | 34"max | Photo #: | Alter lavatory Replace lavatory |
| 3.24 | Is there at least 27 inches clearance from the floor to the bottom of the lavatory that extends at least 8 inches under the lavatory for knee clearance? [306.3.3] | Yes No Measurement: | 27"min | Photo #: | Alter lavatory Replace lavatory |


| 3.25 | Is there toe clearance at least 9 inches high? [306.3.3] Note: Space extending greater than 6 inches beyond the available toe clearance at 9 inches above the floor is not considered toe clearance. | Yes No Measurement: | 9""" 48" | Photo #: | Alter lavatory Replace lavatory |
|------|---|------------------------|----------|----------|---|
| 3.26 | Are pipes below the lavatory insulated or otherwise configured to protect against contact? [606.5] | Yes No | | Photo #: | Install insulation Install cover panel |
| 3.27 | Can the faucet be operated without tight grasping, | Yes No | | | Adjust faucet Replace faucet |
| | pinching, or twisting of the wrist? | | | | • |
| | Is the force required to activate the faucet no greater than 5 pounds? [606.4] | Yes No | | Photo #: | |

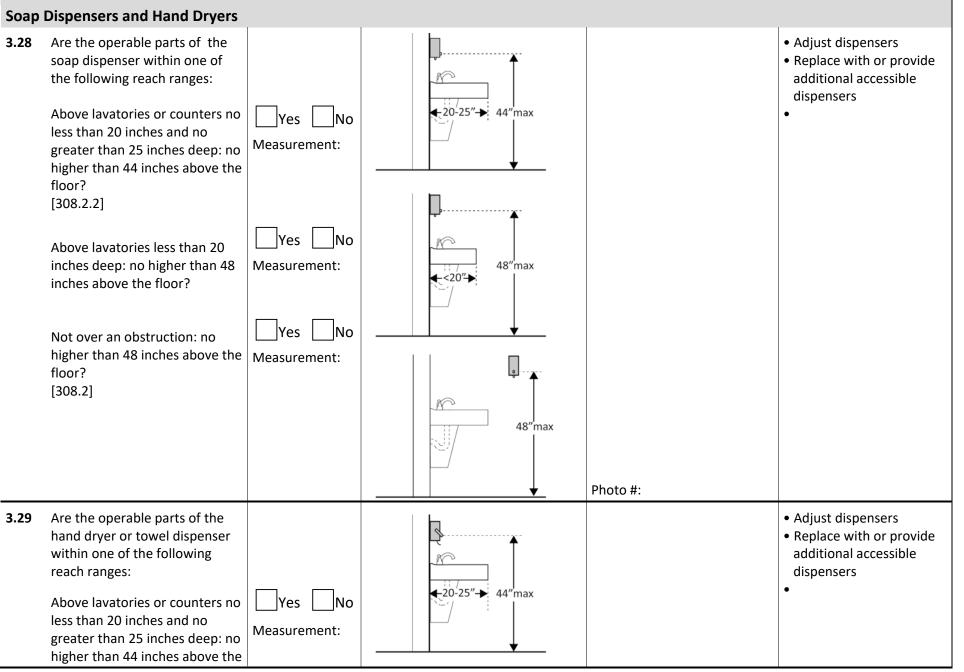

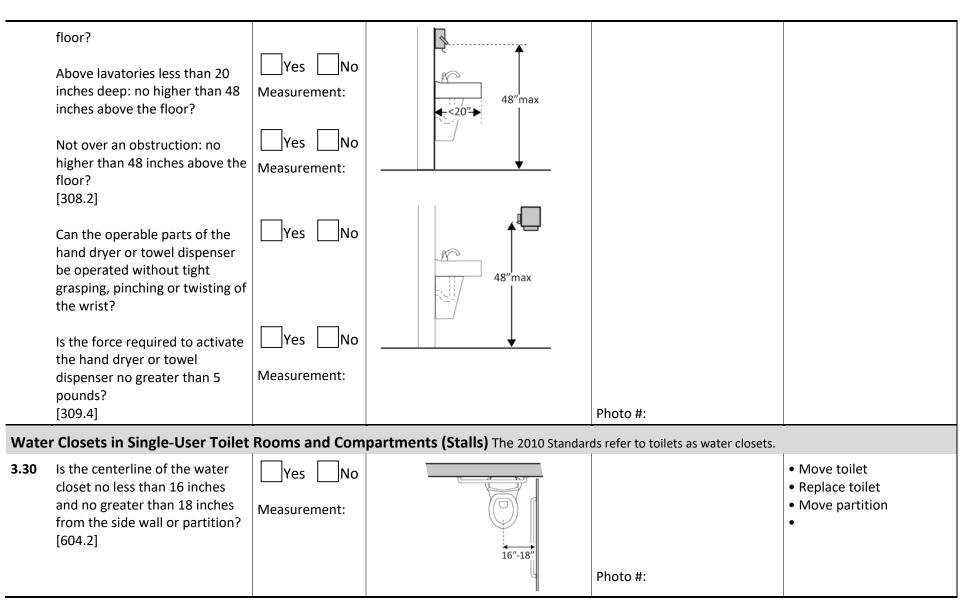


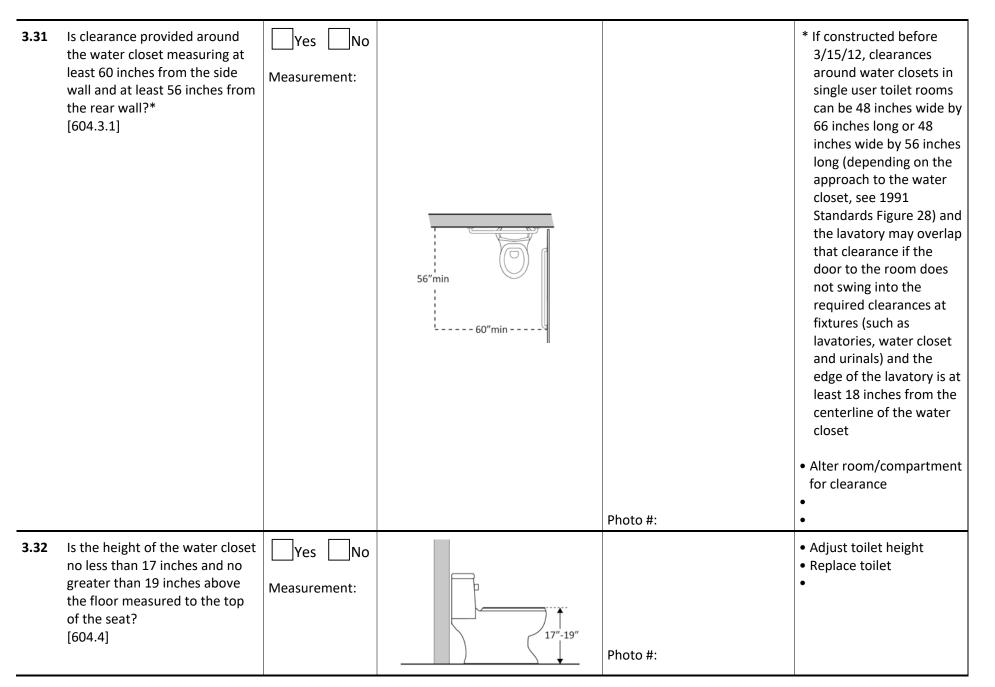

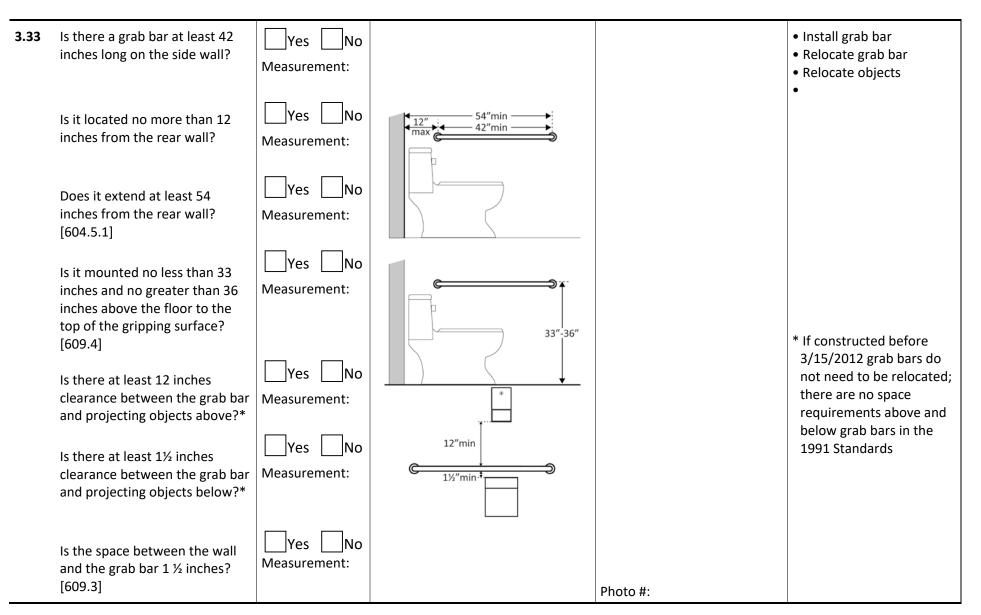

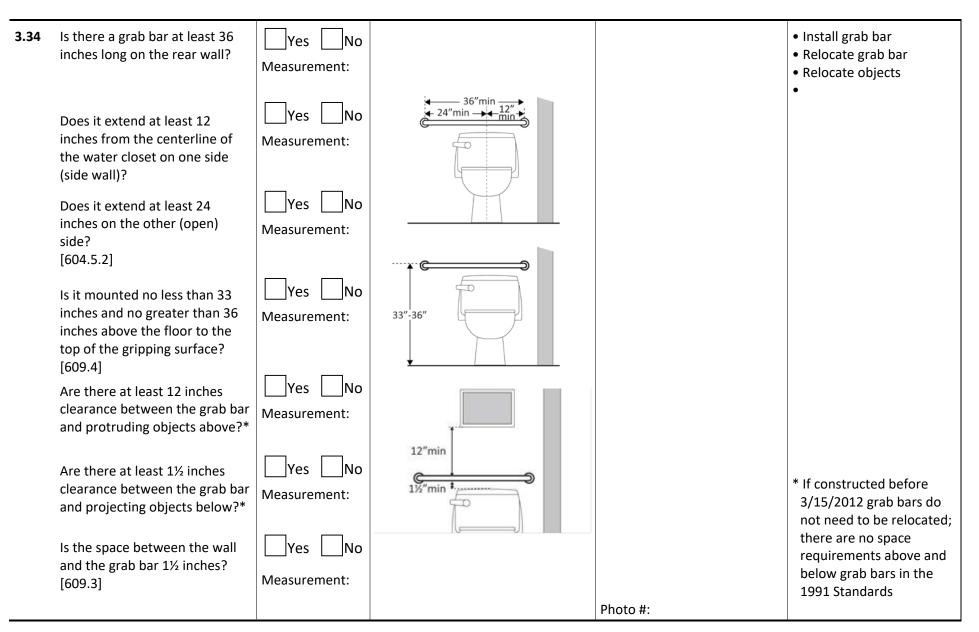

| 3.35 | If the flush control is hand operated, is the operable part located no higher than 48 inches above the floor? [604.6] | Yes No Measurement: | 48"max | Photo #: | Move control Install sensor with override button no higher than 48 inches |
|------|---|----------------------------------|---------------|----------|---|
| 3.36 | If the flush control is hand operated, can it be operated with one hand and without tight grasping, pinching, or twisting of the wrist? Is the force required to activate the flush control no greater than 5 pounds? [605.4] | Yes No Yes No Measurement: | | Photo #: | Change control Adjust control |
| 3.37 | Is the flush control on the open side of the water closet? [604.6] | Yes No | ← open side → | Photo #: | • Move control • |
| 3.38 | Is the toilet paper dispenser located no less than 7 inches and no greater than 9 inches from the front of the water closet to the centerline of the dispenser?* [604.7] | Yes No Measurement: | 7-9" | | * If constructed before 3/15/2012 dispenser does not need to be relocated if it is within reach from the water closet seat; the 1991 Standards do not specify distance from the front of the water closet |

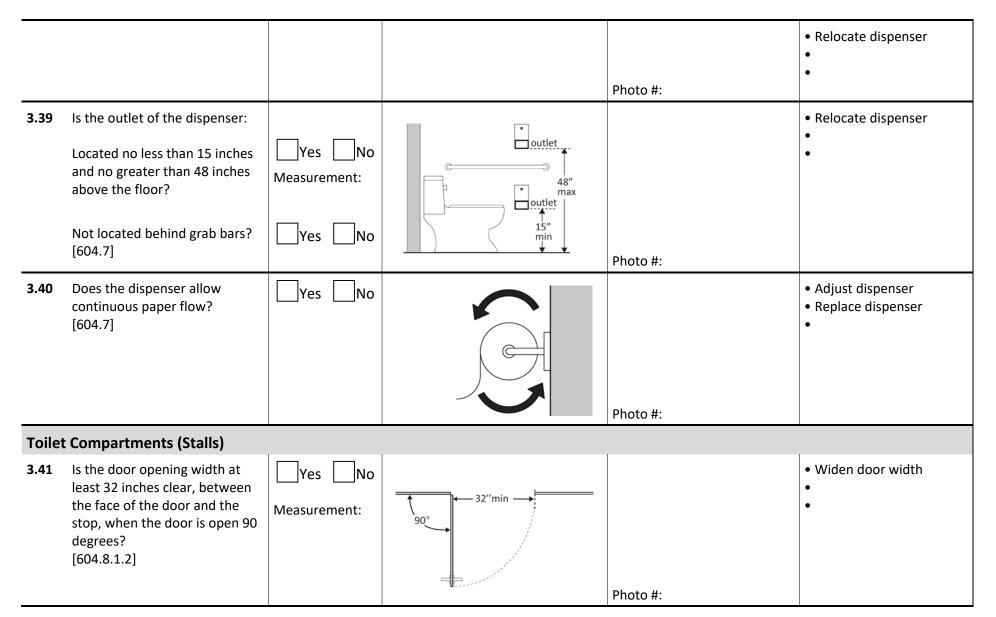

| 3.42 | If there is a front approach to the pull side of the door, is there at least 18 inches of maneuvering clearance beyond the latch side plus 60 inches clear depth? [604.8.1.2] Note: See 2010 Standards 604.8.1.2 Doors for maneuvering clearance requirements on the push side of the door and side approaches to the pull side of the door | Yes No Measurement: | 18"min 60"min | Photo #: | Remove obstructions |
|------|--|------------------------|------------------|----------|--|
| 3.43 | Is the door self-closing? [604.8.1.2] | Yes No | | Photo #: | Add closer Replace door |
| 3.44 | Are there door pulls on both sides of the door that are operable with one hand and do not require tight grasping pinching or twisting of the wrist?* [604.8.1.2] | Yes No | | Photo #: | * If constructed before 3/15/2012 door pulls do not need to be added; door pulls are not required in the 1991 Standards • Replace hardware • |

| 3.45 | Is the lock operable with one hand and without tight grasping, pinching or twisting of the wrist? [309.4] | Yes No | | Photo #: | • Replace lock • |
|------|---|------------------------|------------|----------|---|
| 3.46 | Are the operable parts of the door hardware mounted no less than 34 inches and no greater than 48 inches above the floor? [404.2.7] | Yes No Measurement: | 34"- 48" | Photo #: | Relocate hardware |
| 3.47 | Is the compartment at least 60 inches wide? [604.8.1.1] | Yes No Measurement: | 60"min | Photo #: | Widen compartment |
| 3.48 | If the water closet is wall hung, is the compartment at least 56 inches deep? [604.8.1.1] | Yes No Measurement: | ↓ 56"min → | Photo #: | Widen compartment |

